

INSTALLATION INSTRUCTIONS

PART #5220 Stage 4 Rear Shock Mounts

CONTENTS:

Hardware Kit for 4 Link

To mount bracket, parts located in Hardware Kit H5220
6 ea 1/2" X 5" Long Bolts
12 ea 1/2" Washers
6 ea 1/2" Nyloc Nuts

To mount shocks, parts located in Hardware Kit H5360, H5370
8 ea 1/2" X 3 Bolts
16 ea 1/2" Washers
8ea 1/2" Nyloc Nuts


Suggest Tool List:

1/2" Electric Drill
1/2" Drill Bit
3/4" Sockets and Wrenches

Please read all instructions before beginning:

Cap is removable for future swaybar installation (Swaybar in development)

Mount could be welded instead of bolted onto frame
Position mount at the bottom of frame as shown

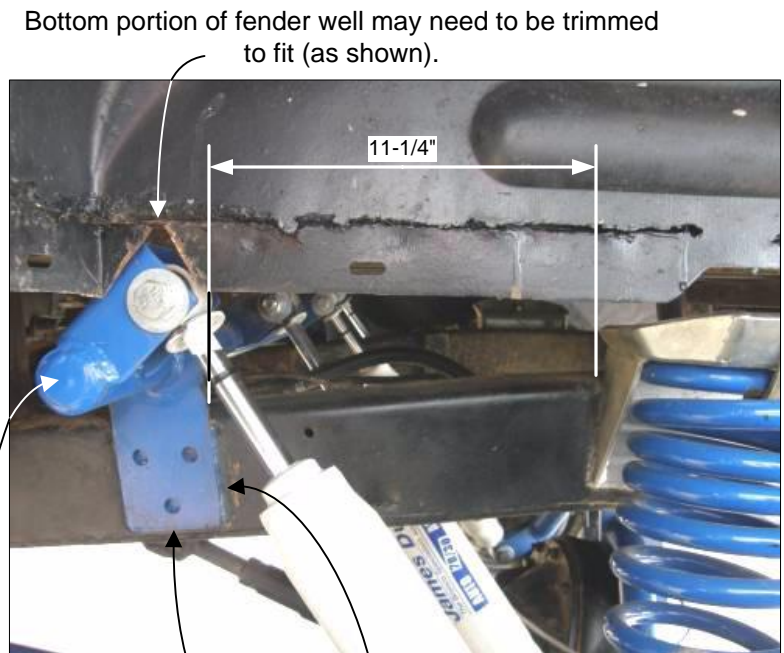

Make sure that before beginning this installation, the 2" Body Lifts are already installed. Measuring from the HD Coil Spring Towers, forward, make a mark on the frame at 11-1/4" (measurement taken from top part of frame as shown). Place shock mount on the frame. Then center mark the three holes for drilling. Remove shock frame mount. Using 1/2" drill bit, drill through both sides of frame. Place shock frame mount in place, insert bolts and tighten with included hardware. Duplicate this procedure for opposite side.

*Be cautious of drilling and welding around fuel lines, electrical wiring, and other components.
Take needed measures to moving these components prior to installation of this kit.*

LIMITED WARRANTY

James Duff Incorporated warrants our products to the original purchaser to be free from defects in materials and workmanship. Warranty periods begin at the date of purchase and varies by product. Shocks have a limited lifetime warranty. Headers, Radiators, and Suspension Products have a one year warranty. Power Brake boosters and Master cylinders have a three year warranty. Adapters and soft goods such as Canvas tops, upholstery, vinyl and rubber products have a 90 day warranty. All warranties are to the original purchaser with proof of purchase only. Such obligations under this warranty shall be limited to the repair or replacement, at JDI's discretion, of any assembly or part which upon examination by JDI proves to be defective. Any costs of removal, installation, reinstallation or freight charges are expressly excluded from this warranty. This warranty covers only manufacturers' defects, and does not cover product finish or damage resulting from abuse, misuse, negligence, racing, alteration, accident or damage in transit.

All returns must be pre-authorized by JDI and accompanied with a Return goods Authorization Number (RGA) and dated proof of purchase. Returns must be made within 90 days of purchase, shipped prepaid, packaged in original cartons to prevent damage in shipment and sent to JDI, 3231 N.W. Park Drive, Knoxville, TN 37921. Returns without RGA# will be refused.

This warranty is expressly in lieu of all other warranties, expressed or implied, including the implied warranties of merchantability and fitness for use. This warranty gives you specific legal rights including other rights that vary from state to state. Some states do not allow limitations on how long implied warranty lasts, or do not allow the exclusion of limitation of incidental or consequential damages, so the above limitations and/or exclusions may not apply to you.

SUSPENSION PRODUCT INFORMATION

Modifying your vehicle with JDI products to improve off road performance may result in the vehicle handling differently than a factory equipped vehicle. Taller tires will cause the vehicle's speedometer to read slow, so recalibration is required. Use of oversized tires, suspension lifts, body lifts, and other modifications may raise your vehicle's center of gravity, resulting in an increased tendency for the vehicle to pitch and roll during sudden turns or abrupt maneuvering. Failure to drive with extreme care to prevent loss of control or vehicle roll over may result in injury or death. Drive at a reduced speed to ensure your ability to maintain control of the vehicle under all driving conditions. We recommend installing functional roll bars and cages as well as double shocking all vehicles for more safety and stability on or off road. Always wear a seat belt when in a vehicle. Consult your owner's manual for recommended tires sizes, safety instruction and warnings unique to your vehicle. It is your responsibility to check state and local laws restricting vehicle height to ensure that modifications to your vehicle are legal.